



## PS Range

(5yr Design Life in Float Service at 20°C)

### Dimensions (mm)

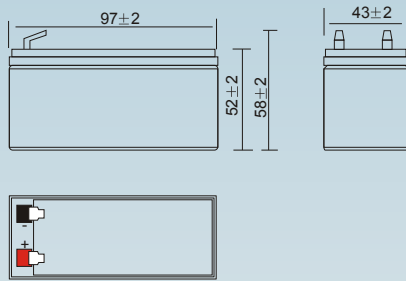


### Standard terminal (mm)

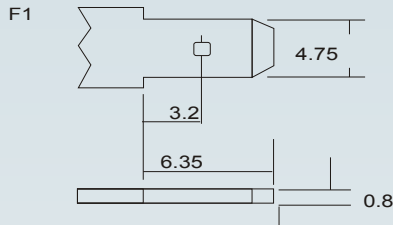

### Physical Specification

Nominal Voltage		12V
Nominal Capacity (20HR)		1.2 AH
Dimension	Length	97 ± 2 mm
	Width	43 ± 2 mm
	Container Height	52 ± 2 mm
	Total Height (with terminal)	58 ± 2 mm
Weight		Approx 0.57kg
Standard Terminal		F1

## PS-1212 12V 1.2AH

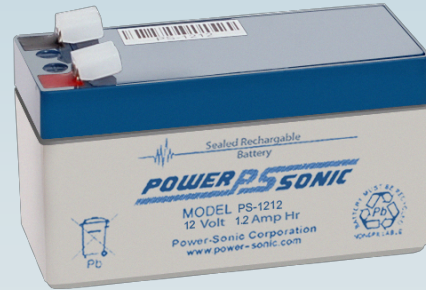

### Discharge Characteristics (25°C, 77°F)

Rated Capacity	20hRate(1.80V/cell)			10hRate(1.80V/cell)			5hRate(1.75V/cell)			3hRate(1.75V/cell)			1hRate(1.60V/cell)		
	1.20AH	1.12AH	1.02AH	0.92AH	0.75AH	1.20AH	1.12AH	1.02AH	0.92AH	0.75AH	1.20AH	1.12AH	1.02AH	0.92AH	0.75AH
Capacity Affected by Temperature	40°C (104°F)	103%													
	25°C (77°F)	100%													
	0°C (32°F)	86%													
Initial Charging Current	Less than 0.3A			Voltage 14.40V ~ 15.0V at 25°C (77°F)			Recommended Charge Current less than 0.3A			Voltage 13.5V ~ 13.8V at 25°C (77°F)					

### Internal Resistance mΩ

90.0 mΩ

### Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	2.29	1.75	1.45	1.26	0.97	0.716	0.603	0.357	0.279	0.227	0.185	0.161	0.130	0.108	0.0594
1.80V/cell	3.07	2.24	1.76	1.49	1.15	0.833	0.676	0.390	0.300	0.242	0.199	0.172	0.137	0.112	0.0600
1.75V/cell	3.46	2.46	1.92	1.60	1.19	0.864	0.707	0.404	0.306	0.248	0.204	0.177	0.140	0.115	0.0606
1.70V/cell	3.81	2.69	2.05	1.68	1.24	0.899	0.729	0.414	0.315	0.254	0.209	0.181	0.142	0.117	0.0617
1.65V/cell	4.20	2.90	2.18	1.78	1.31	0.921	0.746	0.420	0.328	0.263	0.215	0.185	0.144	0.119	0.0625
1.60V/cell	4.63	3.15	2.33	1.90	1.38	0.960	0.754	0.438	0.338	0.271	0.222	0.189	0.145	0.121	0.0629

### Constant Power Discharge (Watts/cell) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	4.18	3.24	2.71	2.37	1.85	1.38	1.16	0.693	0.544	0.444	0.363	0.316	0.256	0.214	0.118
1.80V/cell	5.55	4.09	3.23	2.76	2.15	1.59	1.30	0.751	0.582	0.471	0.388	0.337	0.271	0.221	0.119
1.75V/cell	6.12	4.43	3.49	2.94	2.22	1.63	1.35	0.776	0.591	0.480	0.397	0.346	0.275	0.226	0.120
1.70V/cell	6.56	4.71	3.67	3.07	2.29	1.69	1.39	0.794	0.606	0.492	0.406	0.352	0.278	0.231	0.122
1.65V/cell	7.13	5.04	3.87	3.23	2.40	1.72	1.41	0.801	0.629	0.507	0.416	0.359	0.282	0.235	0.123
1.60V/cell	7.68	5.35	4.08	3.41	2.52	1.78	1.42	0.831	0.645	0.521	0.428	0.365	0.284	0.237	0.124



Power-Sonic Europe Limited  
 3 Buckingham Square, Wickford, Essex, SS11 8YQ  
 Tel: +44 (0)1268 560686 Fax: +44 (0)1268 560902  
 sales@power-sonic.co.uk  
 www.power-sonic.co.uk