




Dimensions (mm)

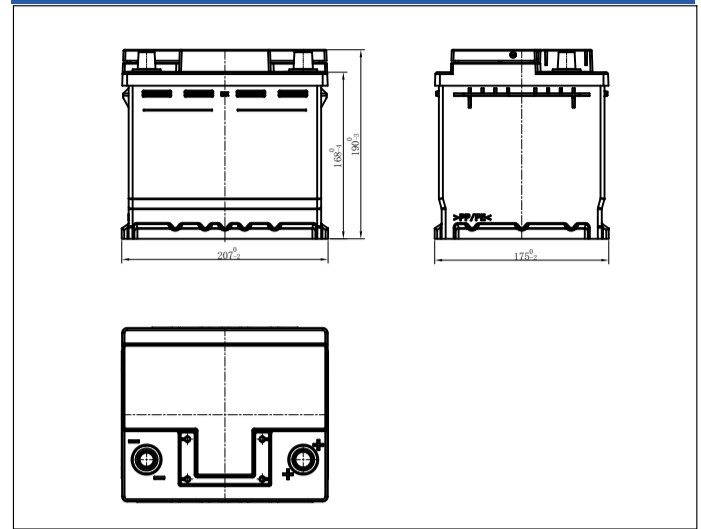

Physical Specification

Nominal Voltage		12V
Nominal Capacity(20HR)		50Ah
Dimension	Length	207 +0/-2mm(8.15inches)
	Width	175 +0/-2mm(6.89inches)
	Container Height	190 +0/-3mm(7.48inches)
	Total Height(with Terminal)	190 +0/-3mm(7.48inches)
Wet Weight		Approx 14.7Kg(32.41lbs)
Standard Terminal		1
Cell layout		0
Hold-Down		B13
Cell plate qty		/
Case		Black-PP Material
Cover		Black-PP Material
Handle		/

Electrical Specification


Rated Capacity	20 hour rate(2.5A)	50Ah
Reserve Capacity		80min
Cold Cranking Performance Amps@0°F(-18°C)		540A

Standard Terminal (mm) Cell Layout


Terminal Type	D	
	Positive	Negative
1	19.5 ⁰ _{-0.3}	17.9 ⁰ _{-0.3}

Figure(0)

Discharge Characteristics(-18°C,0°F)

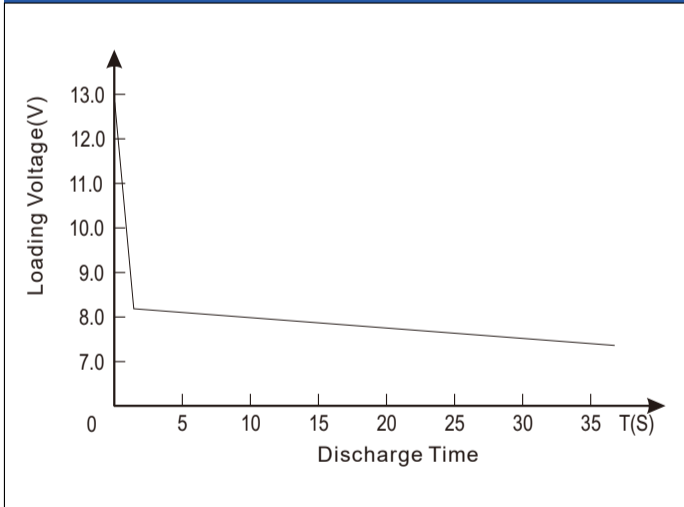

Discharge Characteristics(25°C,70°F)

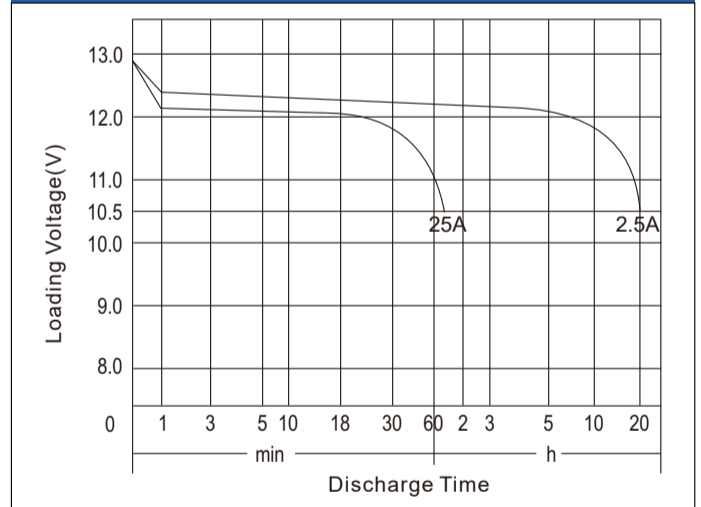

50% DOD Cycle Life Characteristics

